

TIMBERLANE RESILIENCE

Technical Specifications



800-250-2221 • [Timberlane.com](https://www.timberlane.com)

Timberlane Inc. • 150 Domorah Drive, Montgomeryville, PA 18936

TIMBERLANE RESILIENCE

Long-Lasting, Durable Aluminum



Our Resilience Shutters offer a traditional look with the strength and durability of Aluminum. Resilience Shutters offer the latest in styling and design to complement any home or commercial property.

In addition to the more decorative profile options, Timberlane offers three hurricane-rated Resilience Shutters that are sure to capture the true essence of pure relaxation while defending against intense storms. Our hurricane rated shutters are High Velocity Hurricane Zone (HVHZ) approved.

RESILIENCE CUSTOMIZATION OPTIONS

STYLES: Bermuda (Bahama)

SIZES: Shutter Thickness: 1 1/4", 1 5/16"


Width: 15" - 120"

Length: 12 5/8" - 115 1/2"

FINISHES: Premium Powder Coating

HARDWARE: Bermuda (Bahama) Hardware

TIMBERLANE'S 1 RESILIENCE SHUTTER STYLE

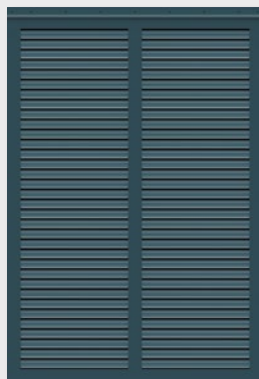

BERMUDA

Fixed Louver Bermuda Specifications

| SPECIFICATION | VALUE |
|------------------------|---|
| Materials | 6063 - T6 Aluminum Alloy |
| Configurations | Built with mid stile |
| Shutter Thickness | 1 ¼" |
| Minimum Shutter Width | 15" |
| Maximum Shutter Width | 120" |
| Minimum Shutter Height | 13 ⅛", 12 ⅝" |
| Maximum Shutter Height | 110 ⅝", 103" |
| Size Increments | 1 ½", 1 ⅜" |
| Stile Width | 2" |
| Top Rail Width | 2" |
| Mid Stile Width | 2" |
| Bottom Rail Width | 2" |
| Louver Type | Fixed |
| Louver Pitch | 60 degrees |
| Louver Spacing | 1 ½", 1 ⅜" |
| Louver Width | 1 ½" |
| Louver Thickness | ⅜" |
| Louver Direction | Reverse |
| Custom Rail Placement | N/A |
| Primer | Epoxy Primer Coat |
| Powder Coat | AAMA 2604 |
| Colors | 10 Premium colors and custom color-matching |
| Finishes | Painted (powder coated) |

Operable Louver Bermuda Specifications

| SPECIFICATION | VALUE |
|------------------------|---|
| Materials | 6063 - T6 Aluminum Alloy |
| Configurations | Built with mid stile |
| Shutter Thickness | 1 ⅞" |
| Minimum Shutter Width | 15" |
| Maximum Shutter Width | 120" |
| Minimum Shutter Height | 16 ⅞", 25 ½" |
| Maximum Shutter Height | 115 ½" |
| Size Increments | 1 ⅞", 3 ¾" |
| Stile Width | 2 ¼" |
| Top Rail Width | 2 ½" |
| Mid Stile Width | 2 ½" |
| Bottom Rail Width | 2 ½" |
| Louver Type | Operable |
| Louver Pitch | Variable |
| Louver Spacing | 1 ⅞", 3 ¾" |
| Louver Width | 2", 4" |
| Louver Thickness | ½" |
| Louver Direction | Reverse |
| Custom Rail Placement | N/A |
| Primer | Epoxy Primer Coat |
| Powdercoat | AAMA 2604 |
| Colors | 10 Premium colors and custom color-matching |
| Finishes | Painted (powder coated) |

Panel & Mission Specifications

| SPECIFICATION | VALUE |
|---------------------|-------|
| Style not available | |

Louver Specifications

| SPECIFICATION | VALUE |
|---------------------|-------|
| Style not available | |

Board & Batten Specifications

| SPECIFICATION | VALUE |
|---------------------|-------|
| Style not available | |